




Accessories


Interchangeable U-Heads and Base Plates

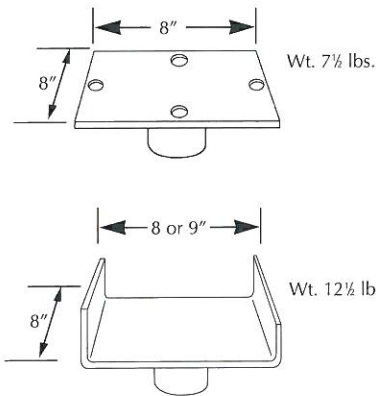


Beam Clamp



A - Clamp



Hitch Pin & Rivet

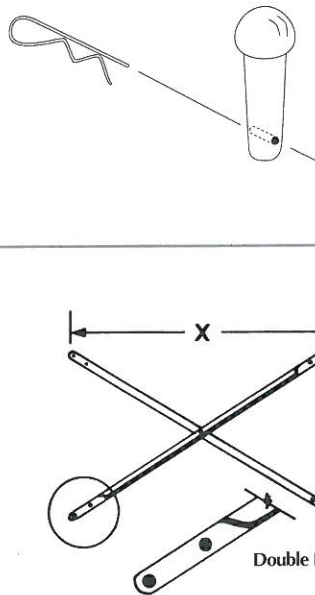

Screws

Total Screw Height: 36"

Total Thread: 24"

Wt. 10 lbs.




Connectors




Wt. 3/4 lb.

L-Rivet




Nailing Plate




Cross Braces

X	Wt. (lbs.)
4'	12
5'	13 1/2
6'	13
7'	16 3/4
8'	18 1/2
10'	22 1/4



Bar Braces




Typical spacing: 12" and 24"

Rigid Clamp

Size
2" x 2"
2" x 2 3/8"


Wt.
2.9 lbs.
4.3 lbs.



Swivel Clamp

Size
2" x 2"
2" x 2 3/8"

Wt.
3 lbs.
4.4 lbs.



Steel Tubing

1.9" O.D.

Wt. 2.72 lbs. per lineal foot

Typical lengths:
8', 10', 13', 16'



Rigid and Swivel Clamps are used to connect two sections of tube or tube and frame leg.