



3 Eucker St., Ridgefield Park, NJ 07660  
201.641.2880 fax.201.641.0847

# FORMING


## Deslauriers Heavy Duty Steel Forms

The perfect reusable steel form for round columns, Deslauriers forms develop an exceptionally smooth, hard surface remarkably free of voids. Minimum number of seams.



The forms are galvanized constant radius steel half round sections and quarter round sections (for forms over 48" in diameter) bolted into units for crane handling on the jobsite. Each component is framed with flange angles diecut and punched for accurate flush butt joints without protrusion on the contact surface. Vertical and horizontal seams, opened and closed with each pour, are connected with high speed bolts to speed setting and stripping. Curing time permitting, one column per form can be produced each working day.

All standard column diameters from 12" to 60" in 8'0", 4'0", and 1'0" lengths are stacked and available for immediate delivery.

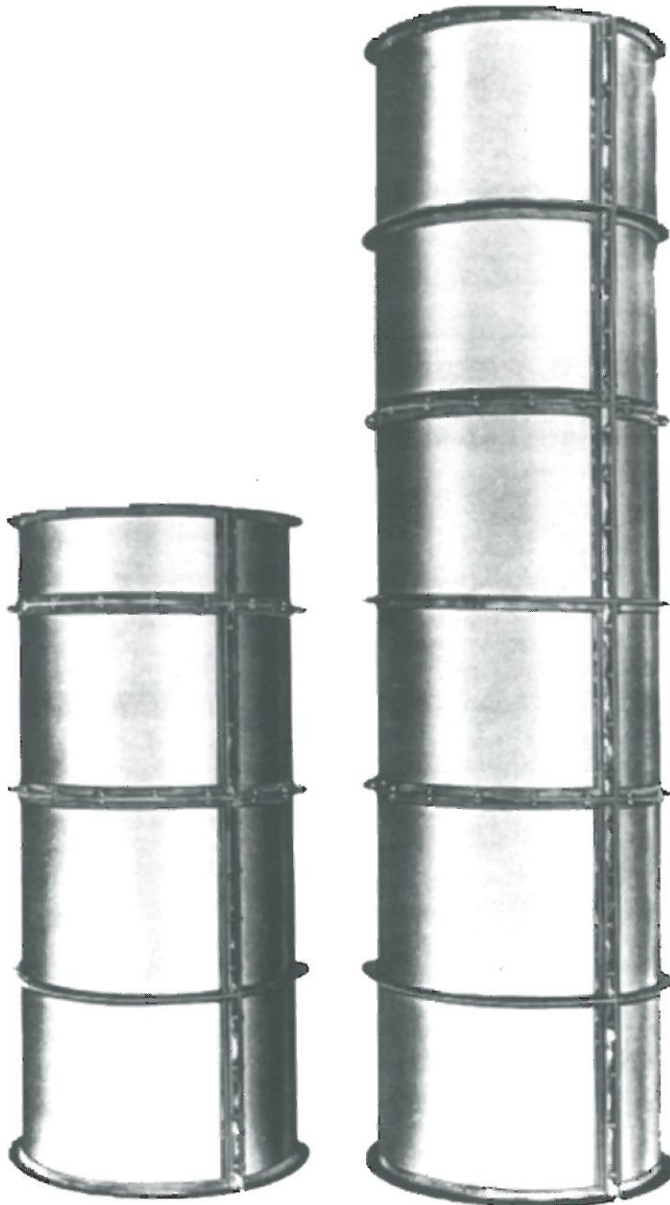

Temperature degree F	FT Per Hour	
	F2000PSF	F3000PSF
40°	8 ft.	13 ft.
50°	10 ft.	16 ft.
60°	12 ft.	20 ft.
70°	14 ft.	24 ft.
80°	16 ft.	26 ft.
		30 ft.

Maximum rate of pour is based on ACI SP-4 4th edition.

To order or for more information, call toll free

**1-877-SHORING**  
[www.edconline.com](http://www.edconline.com)

**FORMING**

**Deslauriers Heavy Duty Steel Forms**

# Deslauriers Heavy Duty Steel Forms



D I S T R I B U T O R S

Diameter	Height	Catalog Number	Wt. per Section
14"	1'	HDS1412	39
	2'	HDS1424	66
	4'	HDS1448	131
	8'	HDS1496	231
16"	1'	HDS1612	45
	2'	HDS1624	76
	4'	HDS1648	149
	8'	HDS1696	268
18"	1'	HDS1812	52
	2'	HDS1824	83
	4'	HDS1848	164
	8'	HDS1896	295
20"	1'	HDS2012	57
	2'	HDS2024	90
	4'	HDS2048	178
	8'	HDS2096	320
22"	1'	HDS2212	62
	2'	HDS2224	98
	4'	HDS2248	192
	8'	HDS2296	344
24"	1'	HDS2412	66
	2'	HDS2424	104
	4'	HDS2448	206
	8'	HDS2496	368
26"	1'	HDS2612	71
	2'	HDS2624	111
	4'	HDS2648	219
	8'	HDS2696	392
28"	1'	HDS2812	76
	2'	HDS2824	119
	4'	HDS2848	234
	8'	HDS2896	416
30"	1'	HDS3012	81
	2'	HDS3024	126